

02/27/98

J-408 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C12800

First Named Inventor or Application Identifier

KAZUHIKO HATANO

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

 Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☒ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
(Note Box 5 below)
- d. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting inventor(s) named in
the prior application, see 37 CFR 1.63(d)(2) and 1.33(d).
5. ☐ Incorporation By Reference (usable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the oath or
declaration is supplied under Box 4c, is considered as being part of the disclosure of
the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP)

of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☐

Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

☒

Correspondence address below

NAME

FITZPATRICK, CELLA, HARPER & SCINTO

Address

277 Park Avenue

City

New York

State

New York

Zip Code

10172-0194

Country

U.S.A.

Telephone

212-758-2400

Fax

212-758-2882

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		15-20 =	0	X \$ 22.00 =	\$ 0.00
INDEPENDENT CLAIMS (37 CFR 1.16(d))		5-3 =	2	X \$ 82.00 =	\$164.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$270.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$780.00
				Total of above Calculations =	\$954.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
					TOTAL = \$954.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 954.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED


NAME	Richard P. Bauer, Reg. No. 31,558
SIGNATURE	
DATE	February 27, 1998

IMAGE PICKUP METHOD AND APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

- 5 The present invention relates to an image pickup method and an image pickup apparatus capable of broadening an apparent dynamic range of a video signal.
- Related Background Art

- 10 Image pickup devices are used widely as an image pickup unit of VTRs with a built-in camera, still video cameras and the like. An image pickup apparatus using an image pickup tube of a video camera or a solid image pickup element has a dynamic range narrower than that of silver-salt photographing systems, and is
- 15 therefore associated with some problems of "crushed white" with lost tonal levels in a bright portion and "crushed black" with lost tonal levels in a dark portion, under rear light or in other cases.

- 20 If such a case occurs with, for example, a video camera, a user increases an exposure amount of a main object with "crushed black" by manually controlling the iris or operating upon a rear light correction button to open the iris by about two steps.

- 25 Even if a proper exposure amount is obtained for the main object through rear light correction, the background has "crushed white" and becomes only white. Therefore, with a conventional image pickup apparatus,

proper adjustment only of the exposure amount for a main object does not solve a problem of a narrow dynamic range of the image pickup apparatus.

In order to solve the problem of "crushed white" and "crushed black", in an image pickup apparatus which uses a line scanner or the like for the conversion of a still image into electrical signals, a single image is synthesized from a plurality of images of the same object picked up at different exposure amounts.

In the case of such an image pickup apparatus taking only a still image, the positional relation between an object and the apparatus is fixed. Therefore, there is no shift between images although they are picked up at different timings, so that there is no practical problem even if a single image is synthesized from a plurality of images.

However, in the case of an image pickup apparatus such as a video camera or a still video camera, the above-described image pickup method cannot be applied reliably because the positional relation between an object and the apparatus may change minutely because of hand vibration or the like.

In such a case, the position of each of a plurality of images of the same object picked up at different timings has a small shift. Therefore, a single image synthesized from these images has the object with an image shift such as double or triple

objects. This becomes a serious issue for recent compact and light video cameras which are likely to have hand vibration.

5 SUMMARY OF THE INVENTION

10 In consideration of the above-described problems, an object of the present invention is to provide an image pickup method and an image pickup apparatus capable of picking up an image with a broad substantial dynamic range without the image shift, even with video cameras or still video cameras which are likely to be subject to image shifts.

15 According to one aspect of the present invention, there is provided an image pickup method of increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, wherein a motion vector of a video signal is detected, and if the detection result indicates that the motion
20 vector is larger than a predetermined threshold value, image synthesization is not performed.

25 According to another aspect of the present invention, there is provided an image pickup method of increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, comprising: a motion vector detecting step of

000047267-022708

detecting a motion vector between corresponding pixels
in the plurality of images; a vector difference
detecting step of detecting a difference between a
motion vector detected at the motion vector detecting
5 step and a motion vector between the plurality of
images; a comparison step of comparing the detection
result of the vector difference detecting step with a
predetermined threshold value; and a synthesization
inhibiting step of inhibiting the image synthesization
10 if the comparison result at the motion vector
comparison step is larger than the predetermined
threshold value.

According to another aspect of the present
invention, there is provided an image pickup method of
15 increasing an apparent dynamic range of a video signal
by synthesizing a single image from a plurality of
images sequentially picked up at different exposure
amounts, comprising: a motion vector detecting step of
detecting a motion vector between corresponding pixels
20 in the plurality of images; a vector difference
detecting step of detecting a difference between a
motion vector detected at the motion vector detecting
step and a motion vector between the plurality of
images; a comparison step of comparing the detection
25 result of the vector difference detecting step with a
predetermined threshold value; a coordinate converting
step of performing a coordinate conversion of the

plurality of images in correspondence with an image shift caused by a time difference when the plurality of images are picked up, if the comparison result at the motion vector comparison step is smaller than the predetermined threshold value; and an image synthesizing step of synthesizing the plurality of images with the image shift corrected at the coordinate converting step, into a single image.

According to another aspect of the invention, there is provided an image pickup apparatus for increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, comprising: motion vector detecting means for detecting a motion vector of the video signal; comparison means for comparing the detection result by the vector difference detecting means with a predetermined threshold value; and synthesization inhibiting means for inhibiting the image synthesization if the comparison result by the comparison means is larger than the predetermined threshold value.

According to another aspect of the invention, there is provided an image pickup apparatus for increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure

amounts, comprising: motion vector detecting means for detecting a motion vector between corresponding pixels in the plurality of images; vector difference detecting means for detecting a difference between a motion
5 vector detected by the motion vector detecting means and a motion vector between the plurality of images; comparison means for comparing the detection result by the vector difference detecting means with a predetermined threshold value; coordinate converting
10 means for performing a coordinate conversion of the plurality of images in correspondence with an image shift caused by a time difference when the plurality of images are picked up, if the comparison result by the motion vector comparison means is smaller than the
15 predetermined threshold value; and image synthesizing means for synthesizing the plurality of images with the image shift corrected by the coordinate converting means, into a single image.

The invention provides the above-described
20 technical aspects. Therefore, in increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, if a difference between a motion vector between pixels
25 in a plurality of images and a motion vector between images is larger than a predetermined threshold value, the pixel is not used for synthesization. Even a video

signal having an image shift caused by a motion of an object itself or hand vibration can be prevented from forming a double or triple images of an object.

Other objects, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a block diagram showing the structure of a VTR with a built-in camera embodying the present invention.

Fig. 2 is a block diagram showing the specific structure of a camera unit of VTR shown in Fig. 1.

15 Fig. 3 is a timing chart illustrating an operation of an image pickup device.

Fig. 4 is a diagram explaining a concept of image processing according to an embodiment of the invention.

20 Fig. 5 is a block diagram showing the specific structure of an operation (computing) circuit of VTR shown in Fig. 1.

Figs. 6A and 6B are diagrams explaining a method of determining threshold levels to be used for the discrimination between "crushed white" and "crushed black".

25 Figs. 7A, 7B, 7C and 7D are diagrams explaining tonal level characteristics.

Fig. 8 is a timing chart illustrating the operation of an image pickup device.

Fig. 9 is a block diagram showing the partial structure of the camera unit.

5 Fig. 10 is a block diagram showing an example of a control circuit of VTR shown in Fig. 1.

Figs. 11A, 11B and 11C are diagrams explaining a concept of image shifts according to another embodiment.

10 Fig. 12 is a block diagram showing the specific structure of VTR of the embodiment.

Fig. 13 is a timing chart illustrating the operation of VTR of the embodiment.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An image pickup method and an image pickup apparatus according to preferred embodiments will be described in detail with reference to the accompanying drawings.

20 Fig. 1 is a block diagram showing the overall structure of a VTR with a built-in camera embodying the present invention.

In Fig. 1, reference numeral 100 denotes a camera unit, reference numeral 200 denotes a processing unit,
25 and reference numeral 300 denotes a recording unit. In the camera unit 100, light incident upon an optical

system 101 is controlled in amount by an iris 102 and focussed on an image pickup device (element) 103.

The image pickup device 103 is made of semiconductor elements such as MOSs and CCDs. An
5 optical image focussed on the focal plane of the image pickup device 103 is converted into electrical video signals to generate a video signal to be output.

A focus drive circuit 107, an iris drive circuit 106 and an image pickup device drive circuit 105 for
10 controlling a light accumulation time or the like drive the optical system 101, iris 102, and image pickup device 103, under the control of a camera control circuit 108. A camera signal processing circuit 104 performs a gamma correction process or other known
15 processes, similar to a signal processing circuit of a general video camera.

The video signal output from the camera unit 100 is an analog signal which is supplied to the processing unit 100 and converted into a digital signal by an A/D
20 converter 201. Pixel data of the converted digital signal is then converted by an operation (computing) circuit 202 in a manner to be described later. Thereafter, the converted pixel data is converted back into an analog signal by a D/A converter 203 and
25 supplied to the recording unit 300.

Reference numeral 204 denotes an image memory which is used by the operation circuit 202 and a motion

vector detection circuit 206 for data calculation.
Reference numeral 205 denotes a memory control circuit
for controlling the operation of the image memory 204.
The memory control circuit 205 outputs read/write
5 address signals of the image memory 204 in response to
a timing signal supplied from the camera control
circuit 108 of the camera unit 100.

The memory control circuit 205 also outputs an
address signal for frame position alignment, according
10 to an output from the motion vector detection circuit
206, when images are synthesized by correcting an
image shift.

A motion vector comparison circuit 207 compares a
motion vector of each pixel detected by the motion
15 vector detection circuit 203 with a motion vector
between images calculated from the motion vector of
each pixel. If a difference of the motion vector of
each pixel from the motion vector between images is
equal to or larger than a predetermined threshold
20 value, position information of each pixel is supplied
to the operation circuit 202 to inhibit synthesization
of pixels.

The operation circuit 202 synthesizes read common
signals and performs enlarging/interpolation in order
25 to convert the common signals into signals of the same
type as original input signals. In this manner, the
operation circuit 202 outputs a video signal of even a

00034757:002749

moving object, with a synthesized tonal level without an image shift.

The video signal output from the operation circuit 202 is converted by the D/A converter 203 into an analog signal and recorded in VTR (video tape recorder) 301. If VTR 301 is a digital recording type, the D/A converter 203 is not necessary.

Next, the details of the operation of the image pickup element 103 will be described. Fig. 2 is a block diagram showing the more detailed structure of the camera unit 100, and Fig. 3 is a timing chart illustrating the operation of the camera unit 100 assuming that NTSC signals are used.

Referring to Fig. 3, a field index signal (F1) is a signal used for discriminating between odd and even fields constituting one frame.

A V_{BLK} signal is a vertical blanking signal, the period with H (high) of this signal corresponding to an effective frame and the period L (low) corresponding to a vertical blanking period.

A T_{pulse} signal controls a charge accumulation time of the image pickup device 103. This T_{pulse} signal is a pulse signal used for reading a pixel to be output to a vertical transfer CCD, if the image pickup device is a CCD image pickup device.

An iris gate signal is a signal designating which of a 1/1000 sec. accumulation signal and a 1/60 sec.

accumulation signal is used as a standard video signal for automatic exposure to be described later.

In the example shown in Fig. 3, during the first blanking period, the 1/1000 sec. charge accumulation is performed, and during the next effective period, the 1/1000 sec. accumulation signal is output. Immediately after the 1/1000 sec. accumulation period, the substantial 60 sec. charge accumulation is performed, and during the next field effective period, the 1/60 sec. accumulation signal is output. In this manner, signals of difference light amounts (1/1000 sec. and 1/60 sec.) are alternately output for each field.

In Fig. 2, reference numeral 20 denotes a known AE control circuit which receives a signal (e.g., video signal) from the camera signal processing circuit 104 via the A/D converter 201 and calculates and outputs an exposure control signal. Reference numeral 22 denotes a known AF control circuit which outputs a focus control signal. Reference numeral 24 denotes a 1/2 frequency division circuit for lowering the frequency of the vertical blanking signal V_{BLK} by a half.

Reference numerals 26 and 27 denote sample-and-hold circuits, reference numeral 28 denotes an inverter, and reference numerals 29 and 30 denote switches which select either an output of the 1/2 frequency division circuit 24 or an output of the 1/2 frequency division circuit 24 inverted by the inverter 28, in order to

determine a sampling timing. Outputs of the sample-hold circuits 26 and 27 are applied to the iris drive circuit 106 and focus drive circuit 107, respectively, to thereby perform an automatic exposure control, an automatic focus control and the like according to those outputs.

In this embodiment, a combination of 1/1000 sec. and 1/60 sec. is used, which corresponds to a light amount change of about four steps (sixteenfold).

Therefore, for example, in the case of a camera using a CCD image pickup device, for example, if an exposure control of a main object is performed by using as a reference the 1/60 sec. accumulation time in the even field, it happens frequently that the background of the even field is likely to have the "crushed white", whereas the main object in the odd field with the light amount lowered by four steps is likely to have the "crushed black". This example assumes the case wherein proper exposure is set to the background for rear light correction, and in accordance with the scene at that time, the accumulation time may be set to a value different from 1/1000 sec.

As different from the embodiment CCD, a CCD having a high speed shutter function of a VOD type has been recently used. This type drains unnecessary charges in the vertical direction of a CCD substrate, and can set the shutter speed very finely. If this CCD is used,

the camera drive circuit 105 can set an optimum shutter speed which is judged by the AE control circuit 20 of the control circuit 108 in accordance with a brightness difference between a main object and a background object.

As described earlier, in this embodiment, the image quality is improved by positively utilizing the "crushed white" and "crushed black" in each field. That is, a portion with the "crushed white" or "crushed black" is replaced by a corresponding portion in the other field (since exposure is different, the "crushed black" or "crushed white" is not being formed in the other field), and video signals of both the fields are synthesized to obtain a final video signal.

The above fundamental approach will be explained with reference to Fig. 4. In Fig. 4, a main object is schematically shown as a rectangle with a vertically long side. A through image (T) shown in Fig. 4 corresponds to an image formed directly by an output of the image pickup device 103. A memory image (M) corresponds to an image formed by a preceding field image signal once stored in the image memory 204. The through image has the main object with the "crushed black" by rear light at each odd field, whereas it has the background with the "crushed white" at each even field.

Since the memory image is formed by a signal delayed by one field, the "crushed white" and "crushed black" are formed in the fields different from those of the through images. Therefore, if the through and
5 memory images are properly combined, an image of a good quality without the "crushed white" and "crushed black" can be obtained. Namely, signals of the through and memory images are compared with predetermined threshold values at each field to discriminate between the
10 "crushed white" and "crushed black" of each pixel, by setting "1" if the signal of each pixel is larger than the threshold value, and "0" if smaller.

Figs. 6A and 6B show the relation between threshold values, pixel brightness levels, and fields.
15 The abscissa of Fig. 6A indicates the brightness level, and the ordinate indicates an occurrence frequency of each brightness level in one frame. As shown in Fig. 6A, a first threshold value Th1 is set so that the "crushed black" can be discriminated, whereas a second
20 threshold value Th2 is set so that the "crushed white" can be discriminated. That is, a brightness level equal to or higher than the first threshold value Th1 is judged as the "crushed black", whereas a brightness level equal to or higher than the second threshold
25 value Th2 is judged as the "crushed white".

Fig. 6B shows the relation between each field and a corresponding threshold value. Since the "crushed

white" and "crushed black" appear alternately in the odd and even fields, the threshold values used for the discrimination are also changed for each field.

It is possible therefore to judge which pixel in
5 which field has the "crushed black" or "crushed white".
By using the judgement results, a pixel signal having a proper exposure amount can be selected from either the through or memory image. For example, in the odd field, the through image is selected for a pixel having
10 a logical product "1" of a judgement A and a judgement B, and the memory image is selected for a pixel having the logical product "0". In the even field, the opposite relation as above is set. In this manner, selection flags shown in Fig. 4 can be obtained.

15 Images synthesized in accordance with the selection flags are shown at the bottom row of Fig. 4. As shown, moving images sufficient for practical use can be obtained, by suppressing the influence of the time axis shift of each image assuming that the main
20 object is moving at a constant speed.

Fig. 5 is a block diagram showing the details of a circuit portion in the operation circuit 202 of the processing circuit 200, the circuit portion being used
25 for the comparison with the first and second threshold values Th1 and Th2 and for the generation of the selection flags. A threshold value switch control signal alternately changes between "H" and "L" at each

field, similar to an FI signal. The threshold value switch control signal is applied to a first threshold value generation circuit 53, and via an inverter 51 to a second threshold value generation circuit 52.

5 In accordance with the threshold value switch control signal, the first and second threshold value generation circuits generate the first or second threshold value Th1 or Th2 having the relation shown in Fig. 6B. Comparison circuits 54 and 55 compare the
10 memory and through images with the threshold values supplied from the threshold value generation circuits 52 and 53, and output judgement signals A and B.

An AND gate 56 outputs a selection flag signal as the logical product of the judgement signals A and B.

15 A switch 57 selects either the memory or through image in accordance with the selection flag signal.

Figs. 7A to 7D are diagrams explaining tonal level characteristics. A solid line in Fig. 7A shows a characteristic of a general video camera. Up to a 100
20 % input, the input/output characteristic is linear. For an input (100 to 400 %), a gentle slope called a knee characteristic appears. A transition point between the linear characteristic portion and knee characteristic portion is represented by P1. For a
25 high speed shutter, this transition point moves to P2. It is assumed that P1 is 1/60 sec and P2 is 1/250 sec. with an exposure change of two steps.

As described earlier, if the exposure amount is four steps, the shutter speed change is represented by the relation between (1) and (5) shown in Fig. 7D. (1) in Fig. 7D corresponds to 1/60 sec., (2) corresponds to 1/125 sec., (3) corresponds to 1/250 sec., (4) corresponds to 1/500 sec., and (5) corresponds to 1/1000 sec. A characteristic with a desired curve can be obtained by using two characteristic lines having different slopes.

Fig. 7B shows examples of synthesized characteristic lines in which different threshold values are used for the discrimination between the "crushed white" and "crushed black".

Fig. 7C shows characteristic lines, (1) outputting an addition average of corresponding two pixel signals, (2) outputting a selected one of two pixel signals, and (3) outputting an addition average with predetermined coefficients.

In the above example, a time resolution is substantially 30 images per second which is almost equal to a frame storage CCD image pickup device. In order to realize a time resolution almost equal to a field storage CCD image pickup device, an example of picking up two images in one field, will be described. A changed circuit portion is shown in Fig. 9, and the timing chart is shown in Fig. 8.

Principally, signals are read from the image pickup device 103 at a speed higher than a general video rate, and the read signals are converted in a time axis into a normal rate. First and second field memories 90 and 91 each have a memory capacity of one field image information. The first field memory 90 delays a $1/1000$ sec. accumulation signal in order to synchronize it with a $1/120$ sec. read signal. The second field memory 91 performs a twofold time expansion in order to change the $1/120$ sec. video signal to an NTSC signal of $1/60$ sec.

Rows (a) to (d) shown in Fig. 9 correspond to signals (a) to (d) shown in Fig. 8. The image pickup device 103 capable of performing the above operation may be a MOS solid image pickup device of an XY addressing type.

Next, another example of the details of the control circuit 108 will be described with reference to Fig. 10. A master clock generator 40 generates an internal master clock to be used by the control circuit 108, in accordance with an external reference signal.

A clock generator 41 for a $1/1000$ sec. shutter generates a high speed clock from the master clock supplied from the master clock generator 40. A clock generator 42 for a $1/60$ sec. shutter generates a low speed clock from the master clock supplied from the master clock generator 40.

A switch 45 changes its contact point alternately at each field to alternately apply the outputs of the clock generators 41 and 42 to the drive circuit 105.

5 An AE control signal generator 43 generates an AE control signal for the iris control, in accordance with the video signal supplied from the camera signal processing circuit 104. A control signal holding circuit 44 holds the AE control signal during one field period.

10 A switch 46 changes its contact point alternately at each field to alternately apply the AE control signal of the AE control signal generator 43 and the AE control signal held by the control signal holding circuit, to the iris control circuit 106. A switch
15 signal generator 47 controls the switching of the switches 45 and 46 which are synchronously switched.

In the above example, the clock generators for generating high and low speed clocks are provided, and the high and low speed clocks are switched in response
20 to a signal of the switch signal generator output at each field. Accordingly, the circuit structure and operation can be simplified which are particularly suitable for moving images.

25 In the above description, images are formed at different exposure amounts by changing the shutter speed. If a high speed iris function is available, the iris may be changed at high speed. Alternately, a

light reducing filter using a spatial light modulating device such as PLZT may be electrically controlled.

As described above, various calculations may be made in this embodiment. An example of image
5 synthesization to be performed with a simple process and more effective simple addition calculation will be described.

Figs. 11A to 11C are conceptual diagrams
10 explaining an image shift of an object in the two images (odd and even field images) relative to a display screen (image pickup device 103).

It is assumed that the upper left in the common area of the even and odd images is a memory read start point P. Then, a point P_{ODD} shown in Fig. 11B is the
15 image memory read start point for the odd image, and a point P_{EVEN} shown in Fig. 11C is the image memory read start point for the even image. By using these start points, video signals with no image shift can be
20 generated for the common area of the even and odd images.

A specific example of the structure shown in Fig. 1 applied to this embodiment is shown in Fig. 12.

Referring to Fig. 12, an input video signal is converted into a digital signal by the A/D converter
25 201, and supplied to a first field memory 204a and a motion detection circuit 206.

An output of the first field memory 204a is supplied to another input terminal of the motion vector detection circuit 206. The motion vector detection circuit 206 detects motion information of each pixel from two video signals having one field time delay, and in accordance with this motion information, generates an image shift correction signal. This image shift correction signal is supplied to the memory control circuit 205 which controls the first field memory 204a in accordance with the image shift correction signal.

The image shift correction signal generated by the motion vector detection circuit 206 is supplied also to the motion vector comparison circuit 207. The motion vector comparison circuit 207 is constituted of a threshold generation circuit 61, a comparison circuit 62, an address conversion circuit 63, and the like. The image shift information output from the motion vector detection circuit 206 is supplied to the threshold generation circuit 61 and comparison circuit 62. The threshold generation circuit 61 generates a threshold value to be used for the judgement of an object, and supplies it to the comparison circuit 62.

The comparison circuit compares the threshold value with the motion information of each pixel to judge whether the motion of each pixel is caused by hand vibration or by some other motion. In other words, it is judged whether the motion of each pixel is

caused by the motion of the object itself, and an address of a pixel which was judged as having a motion other than by hand vibration, is supplied to the address conversion circuit 63.

5 In accordance with interpolation information supplied from an enlarging/interpolation circuit 202a, the address conversion circuit 63 converts an address of the pixel which was judged as having a motion other than by hand vibration, into an address after
10 enlarging/interpolation, generates a selection signal for inhibiting the pixel to be synthesized and selecting the pixel in the field with a proper exposure, and supplies the selection signal to a next stage selector 202c.

15 The video signal of the common area shown in Fig. 11A is output from the first field memory 204a and converted into a signal of the original type (e.g., NTSC signal) same as the input signal.

 The smaller the common area, the larger the
20 enlarging factor becomes. Regardless of what enlarging factor is used, the video signal is converted into a signal of the original type and stored via an adder 202b into a second field memory 204b.

 Assuming that the video signal stored in the
25 second field memory 204b is of the odd field, the video signal of the next even field is output from the enlarging/interpolation circuit 202a and added to the

corresponding video signal by the adder 202b for each pixel.

The addition signal is supplied via the terminal A of the selector 202c and via the EVEN terminal of another selector 207 to the D/A converter 203. The addition signal is also supplied via the terminal A of the selector 202c to the second field memory 204b. During the next odd field, new odd field information is stored in the second field memory 204b while the same video signal is supplied to the D/A converter 203 via the ODD terminal of the selector 207 through a read-modify-write operation.

A switch 208 is open for the odd field and close for the even field. While the new odd field information is written in the second field memory, the adder 202b is made through by connecting to the terminal E.

The terminal A of the selector 202c is supplied with the addition signal, the terminal O is supplied with the odd field information output from the second field memory 204b, and the terminal E is supplied with the even field information. If the selection signal from the motion vector comparison circuit 207 indicates that a pixel has a motion caused by hand vibration, the addition signal is selected, whereas if the selection signal indicates that a pixel has a motion other than by hand vibration, a video signal of either the even or

odd field having a proper exposure is selected. The selected signal is supplied to the next stage selector 207 and second field memory 204b. A video signal generated in the above manner is output from the D/A converter 203 in the form of analog signal same as the original input signal.

The operation of the above-described processes is illustrated in the timing chart of Fig. 13.

In the timing chart shown in Fig. 13, a signal indicated at A is a discrimination signal between the odd and even fields and corresponds to an output timing of the enlarging/interpolation circuit 202a.

A signal indicated at B shows an open/close timing of the switch 208. The function of the adder 202b changes with this open/close of the switch 208. If the switch 208 is open, the signal output from the enlarging/interpolation circuit 202a passes through the adder 202b, whereas if the switch 208 is close, the signal is added by the adder 202b.

A signal indicated at C shows a write timing of the second field memory 204b. During the odd field indicated by the signal A, the odd field image signal is written in the second field memory, whereas during the even field indicated by the signal A, the video signal selected by the selector 202c according to the read-modify-write operation is written again in the second field memory 204b at the same addresses.

A signal indicated at D shows a switching timing of the selector 207. Image information synthesized from the odd field image information during a period t1 and the even field image information during a period t2 is output during a period t2, and the same synthesized image information is again read and output during a period t3.

In synthesizing an image, if it is judged that a pixel has a motion other than by hand vibration, a video signal of either the even or odd field having a proper exposure is selected, so that a time axis shift of the image may be feared. However, this does not pose any practical problem, as described with an example of a calculation process for a synthesized image shown in Fig. 4.

As described previously, in this embodiment, each process is performed in the unit of two fields. A line interpolation process may be interchanged between the odd and even fields to make compatible with interlacing and reduce so-called field interference. In order to reduce this field interference, a line interpolation circuit is inserted at a point Q between the second field memory 204b and selector 207.

The invention is applicable to any modification or alteration of the above-described embodiment without departing from the scope and spirit thereof.

The present invention may be applied to a system constituted by a plurality of apparatuses (e.g., a host computer, interface units, a reader, a printer, and the like) or to a system constituted by a single apparatus.

5 The scope of the invention also includes a system or apparatus whose computer (CPU or MPU) runs to operate various devices connected thereto in accordance with software program codes supplied to the system or apparatus so as to realize the functions of the above
10 embodiments.

 In this case, the software program codes themselves realize the embodiment functions. Therefore, the program code themselves and means for supplying such program codes to a computer, e.g., a
15 storage medium storing such program codes, constitute the present invention.

 The storage medium storing such program codes may be a floppy disk, a hard disk, an optical disk, a magneto-optical disk, a CD-ROM, a magnetic tape, a non-
20 volatile memory card, and a ROM.

 Obviously, such program codes are other types of embodiments of this invention, not only for the case wherein the embodiment functions are realized by executing the program codes supplied to the computer
25 but also for the case wherein the embodiment functions are realized by the program codes used with an OS

(operating system) on which the computer runs or with other various types of application software.

Furthermore, the scope of the invention also includes obviously the case wherein in accordance with
5 the program codes stored in a memory of a function expansion board or unit connected to the computer supplied with the program codes, a CPU or the like of the function board or unit executes part or the whole of the actual tasks for realizing the embodiment
10 functions.

As described so far, according to the present invention, a plurality of images are sequentially picked up at different exposure amounts, and an apparent dynamic range of a video signal is increased
15 by synthesizing one image from a plurality of images. In such a case, if a difference between a motion vector between pixels in a plurality of images and a motion vector between images is larger than a predetermined threshold value, the pixel is not used for
20 synthesization in order to increase a substantial dynamic range. For example, even under rear light, not only the main object but also the background can have images at proper exposures. Even a video signal having an image shift caused by a motion of an object itself
25 or hand vibration can be subjected to a practically usable dynamic range increasing process, to thereby prevent double or triple images.

Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298

WHAT IS CLAIMED IS:

1. An image pickup method of increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, wherein a motion vector of a video signal is detected, and if the detection result indicates that the motion vector is larger than a predetermined threshold value, image synthesization is not performed.

10

2. An image pickup method of increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, comprising:

15

a motion vector detecting step of detecting a motion vector between corresponding pixels in the plurality of images;

a vector difference detecting step of detecting a difference between a motion vector detected at said motion vector detecting step and a motion vector between the plurality of images;

20

a comparison step of comparing the detection result of said vector difference detecting step with a predetermined threshold value; and

25

a synthesization inhibiting step of inhibiting the image synthesization if the comparison result at said

motion vector comparison step is larger than the predetermined threshold value.

3. An image pickup method of increasing an
5 apparent dynamic range of a video signal by
synthesizing a single image from a plurality of images
sequentially picked up at different exposure amounts,
comprising:

10 a motion vector detecting step of detecting a
motion vector between corresponding pixels in the
plurality of images;

15 a vector difference detecting step of detecting a
difference between a motion vector detected at said
motion vector detecting step and a motion vector
between the plurality of images;

a comparison step of comparing the detection
result of said vector difference detecting step with a
predetermined threshold value;

20 a coordinate converting step of performing a
coordinate conversion of the plurality of images in
correspondence with an image shift caused by a time
difference when the plurality of images are picked up,
if the comparison result at said motion vector
comparison step is smaller than the predetermined
25 threshold value; and

an image synthesizing step of synthesizing the plurality of images with the image shift corrected at said coordinate converting step, into a single image.

5 4. An image pickup method according to claim 1, wherein a shutter speed is changed in order to change the exposure amount.

10 5. An image pickup method according to claim 2, wherein a shutter speed is changed in order to change the exposure amount.

15 6. An image pickup method according to claim 3, wherein a shutter speed is changed in order to change the exposure amount.

20 7. An image pickup method according to claim 1, wherein an iris is changed at high speed in order to change the exposure amount.

 8. An image pickup method according to claim 2, wherein an iris is changed at high speed in order to change the exposure amount.

25 9. An image pickup method according to claim 3, wherein an iris is changed at high speed in order to change the exposure amount.

89031767.022798

10. An image pickup apparatus in which an apparent dynamic range of a video signal is increased by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, comprising:

5 motion vector detecting means for detecting a motion vector of the video signal;

comparison means for comparing the detection result by said vector difference detecting means with a predetermined threshold value; and

10 synthesization inhibiting means for inhibiting the image synthesization if the comparison result by said comparison means is larger than the predetermined threshold value.

15 11. An image pickup apparatus in which an apparent dynamic range of a video signal is increased by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, comprising:

20 motion vector detecting means for detecting a motion vector between corresponding pixels in the plurality of images;

25 vector difference detecting means for detecting a difference between a motion vector detected by said motion vector detecting means and a motion vector between the plurality of images;

comparison means for comparing the detection result by said vector difference detecting means with a predetermined threshold value;

coordinate converting means for performing a
5 coordinate conversion of the plurality of images in correspondence with an image shift caused by a time difference when the plurality of images are picked up, if the comparison result by said motion vector comparison means is smaller than the predetermined
10 threshold value; and

image synthesizing means for synthesizing the plurality of images with the image shift corrected by said coordinate converting means, into a single image.

15 12. An image pickup apparatus according to claim 10, wherein a shutter speed is changed in order to change the exposure amount.

20 13. An image pickup apparatus according to claim 11, wherein a shutter speed is changed in order to change the exposure amount.

25 14. An image pickup apparatus according to claim 10, wherein an iris is changed at high speed in order to change the exposure amount.

0001757 000708

15. An image pickup apparatus according to claim 11, wherein an iris is changed at high speed in order to change the exposure amount.

ABSTRACT OF THE DISCLOSURE

An image pickup method and an image pickup apparatus are provided which can pick up an image with a broad substantial dynamic range even with a video camera or the like which is likely to be subject to image shifts. In increasing an apparent dynamic range of a video signal by synthesizing a single image from a plurality of images sequentially picked up at different exposure amounts, if a difference between a motion vector between pixels in a plurality of images and a motion vector between images is larger than a predetermined threshold value, the pixel is not used for synthesization. Even a video signal having an image shift caused by a motion of an object itself or hand vibration can be subjected to a practically usable dynamic range increasing process.

FIG. 1

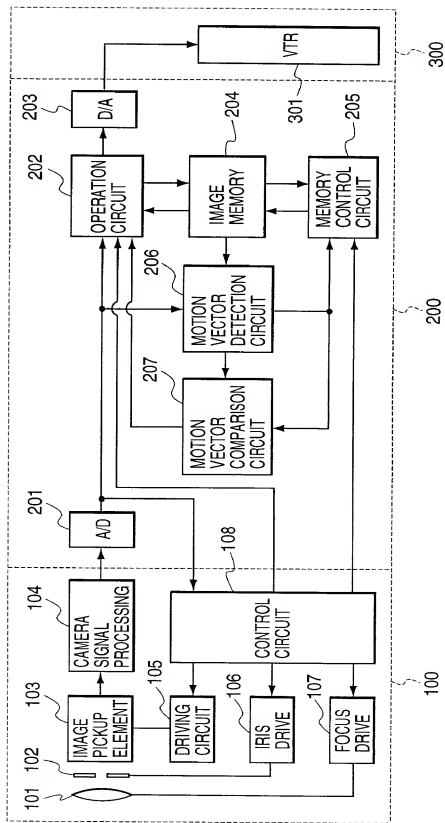


FIG. 2

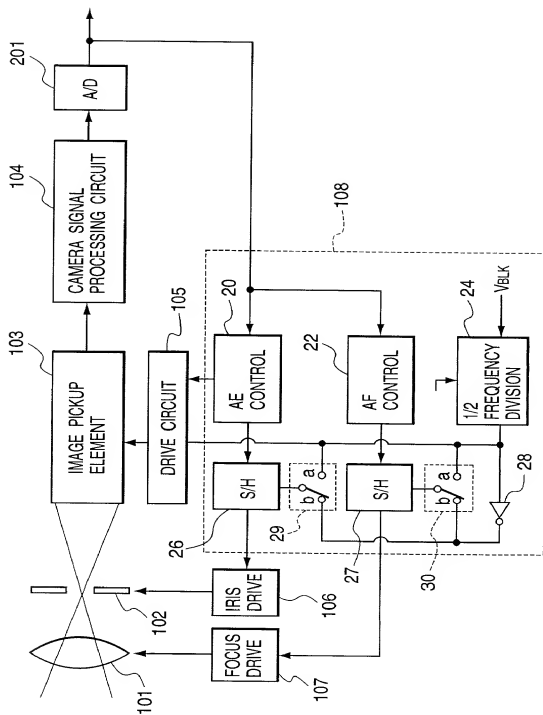


FIG. 3

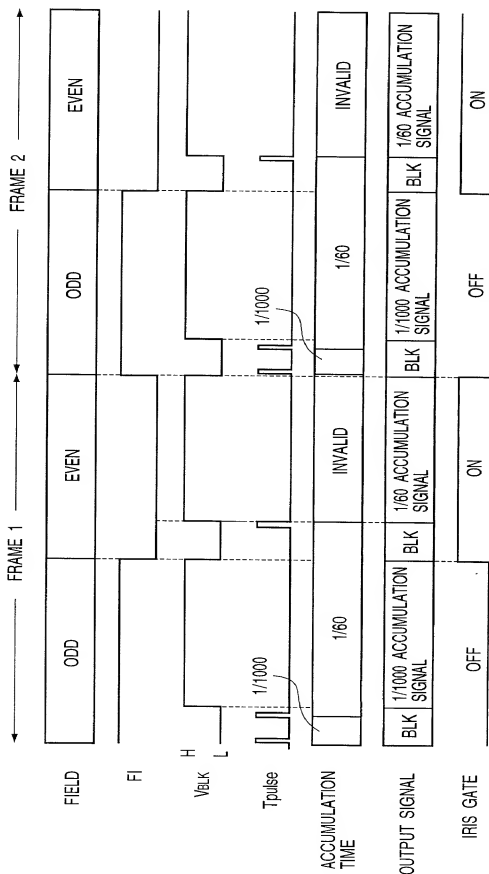


FIG. 4

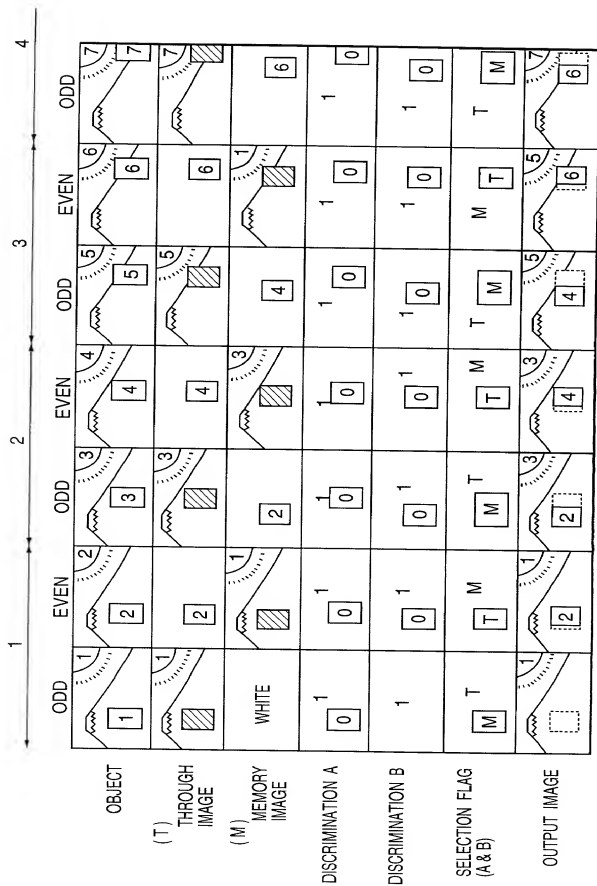


FIG. 5

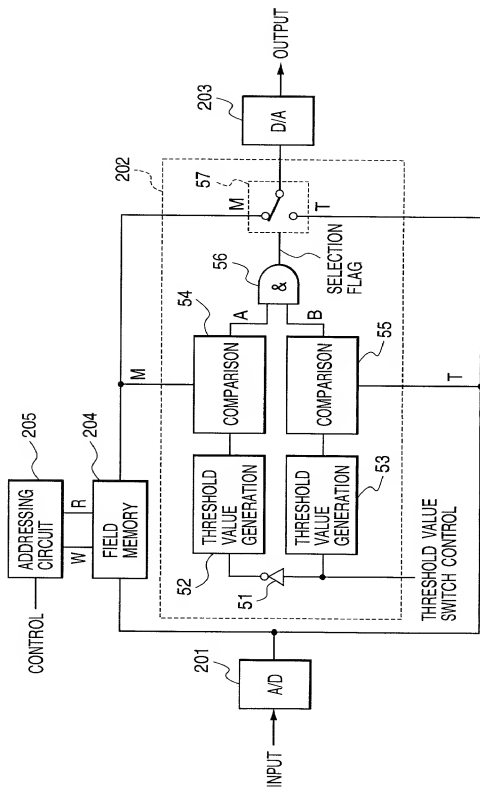
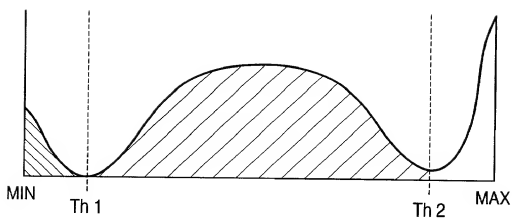


FIG. 6A*FIG. 6B*

FIELD \	T (THROUGH)	M (MEMORY)
ODD	Th 1	Th 2
EVEN	Th 2	Th 1

FIG. 7A

BASIC CHARACTERISTIC

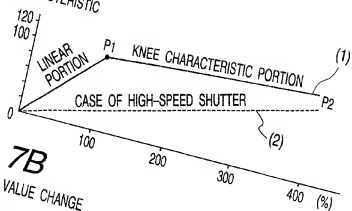


FIG. 7B

THRESHOLD VALUE CHANGE
120 +




FIG. 7C

OPERATION CHANGE

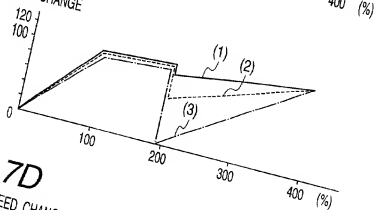


FIG. 7D

SHUTTER SPEED CHANGE

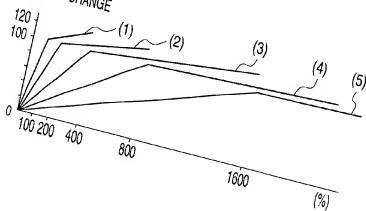


FIG. 8

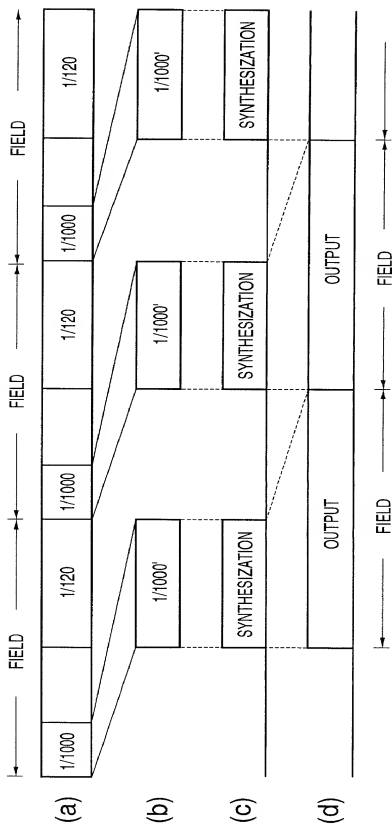


FIG. 9

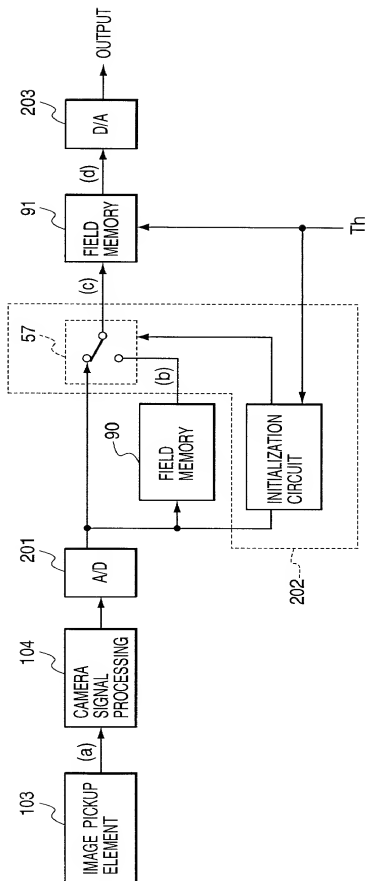


FIG. 10

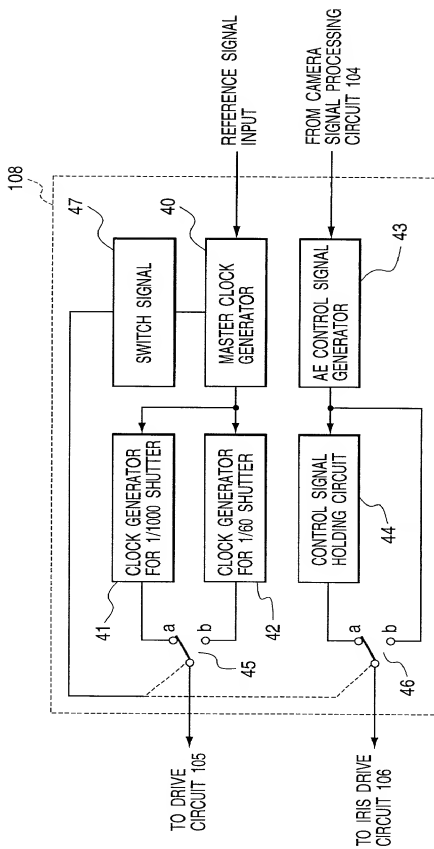


FIG. 11A

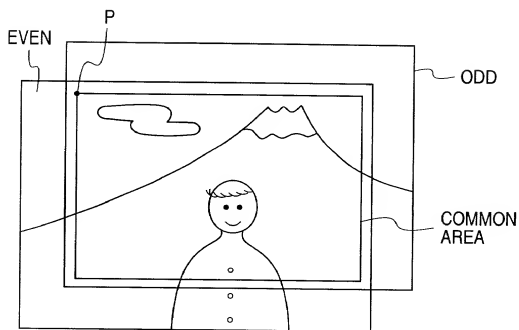


FIG. 11B




FIG. 11C




FIG. 12


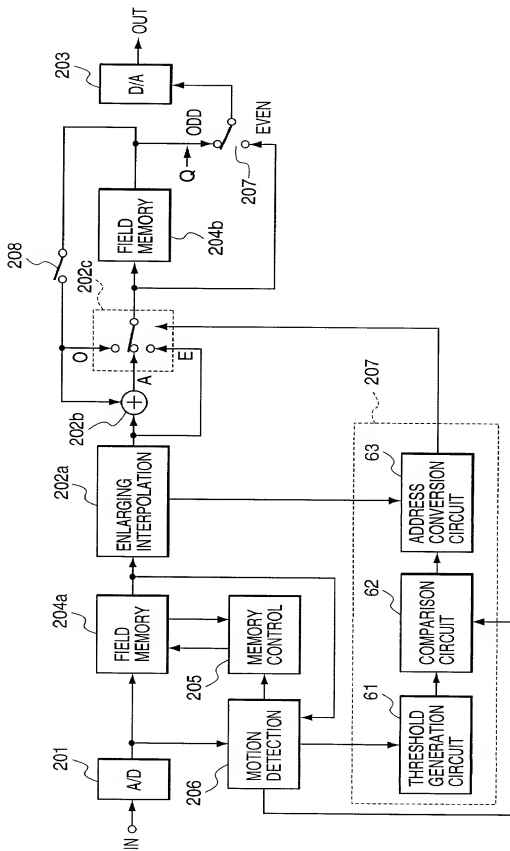


FIG. 13

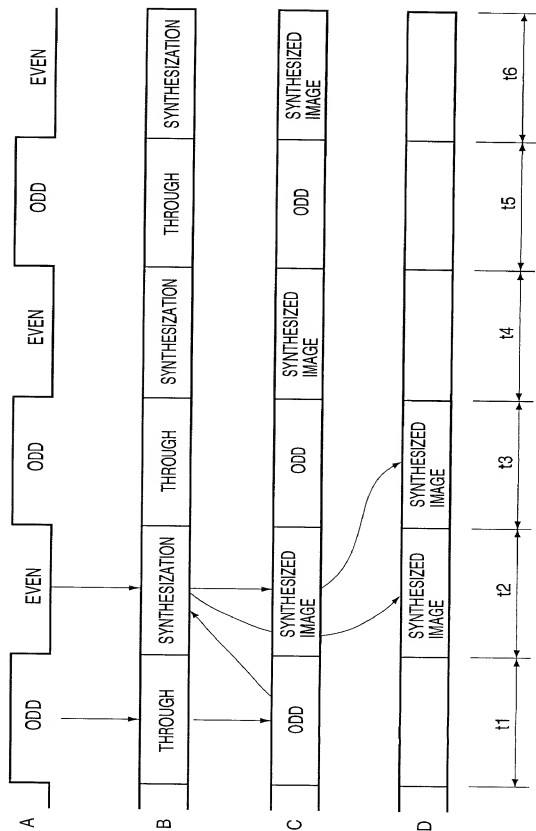

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled _____

IMAGE PICKUP METHOD AND APPARATUS

the specification of which ☒ is attached hereto ☐ was filed on _____
_____ as United States Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	9-045698	February 28, 1997	Yes

09031767-022798

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 2)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Status

Application No. Filed (Day/Mo./Yr.) (Patented, Pending, Abandoned)

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), Fredrick M. Zullow (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382), Dominick A. Conde (Registration No. 33,856), Pasquale A. Razzano (Reg. No. 25,512), John W. Behringer (Registration No. 23,086), Robert C. Kline (Registration No. 17,739), Mark J. Iuri (Registration No. 36,171), Michael P. Sandomato (Registration No. 35,345), Jack M. Arnold (Registration No. 25,823), John D. Carlin (Registration No. 37,292), Daniel S. Glueck (Registration No. 37,838), Joseph W. Ragusa (Registration No. 38,586), Brian L. Klock (Registration No. 36,570), Anne M. Maher (Registration No. 38,231), William J. Zak, Jr. (Registration No. 38,668), Thomas D. Pease (Registration No. 35,317), Bruce M. Wexler (Registration No. 35,409), Robert S. Mayer (Registration No. 38,544), Errol B. Taylor (Registration No. 39,853), Matthew J. Golden (Registration No. 35,161), Sean W. O'Brien (Registration No. 37,689), Dolores A. Moro-Grossman (Registration No. 33,972), T. Thomas Gellenhien (Registration No. 39,683), Douglas Sharrott (Registration No. 39,832), Gordon F. Sieckmann (Registration No. 28,667), Jay H. Anderson (Registration No. 38,371), Nandu A. Talwalkar (Registration No. 41,339), Paul A. Pysher (Registration No. 40,780), Joseph G. Swan (Registration No. 41,338), Kenneth Crimaldi (Registration No. 40,968), Shu Muk Lee (Registration No. 41,147), Kathryn Sieburth (Registration No. 40,072), Lee A. Goldberg (Registration No. 38,894), and Leisa M. Smith (Registration No. 39,378).

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

0001757-022708

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 3)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Kazuhiko HATANO

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 8-19, Sakaigihon-cho, Hodogaya-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha, 30-2, Shimomaruko 3-
chome, Ohta-ku, Tokyo, Japan

00031757-022708